



**Plan View**

Plan view of forward control towing vehicle at 11 feet width.  
Seating position indicated in Red

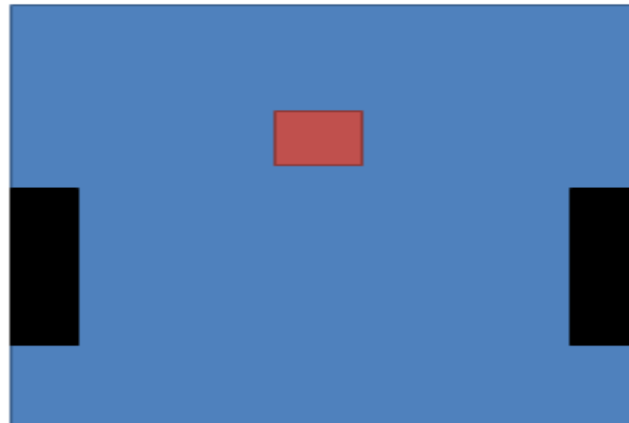


Create an imaginary arc of radius 1 meter from the normal driving position  
No obstructions can be within this area

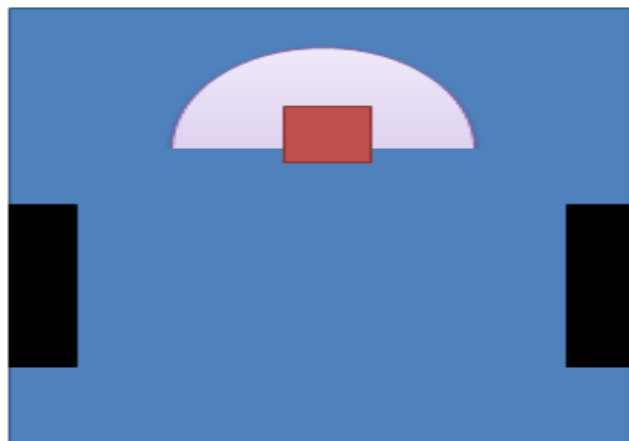


**Two supports can be placed within the drivers vision:**


- Maximum size of 125mm Square Section or 150mm Outside Diameter
- They must be at least 45° to the left and right from direct ahead
- Supports will be outside of the 1m radius arc, and comply with above otherwise they may be placed anywhere.

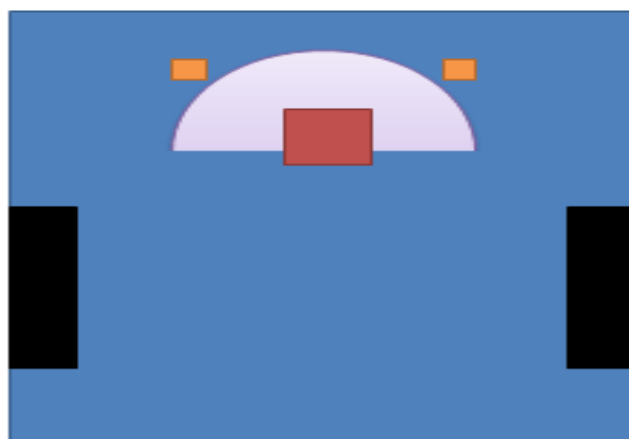


No obstructions to be placed forward of this line if within the drivers vision which must be free to a height of 400mm. (Min)  
This includes temporary movement.  
The only exception will be mirrors or similar.

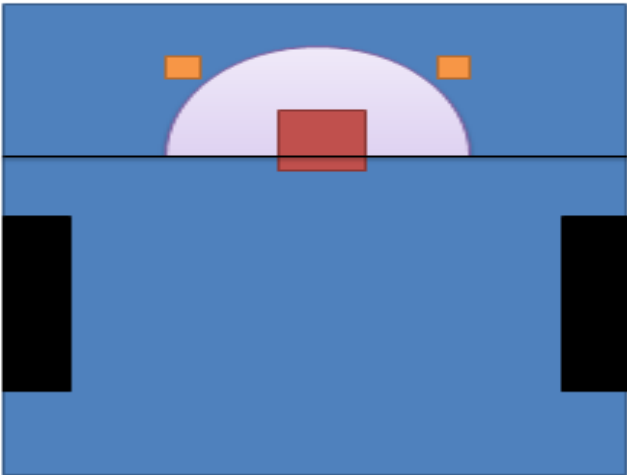


Sight line permitted to shift from 180° to 140° for procession only

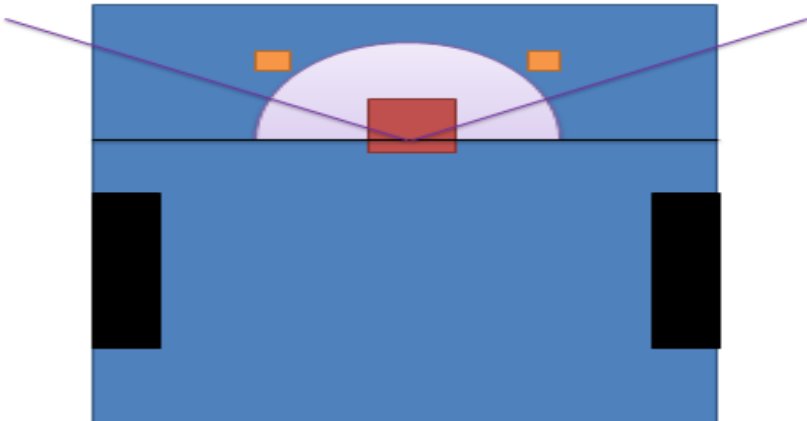


Front View

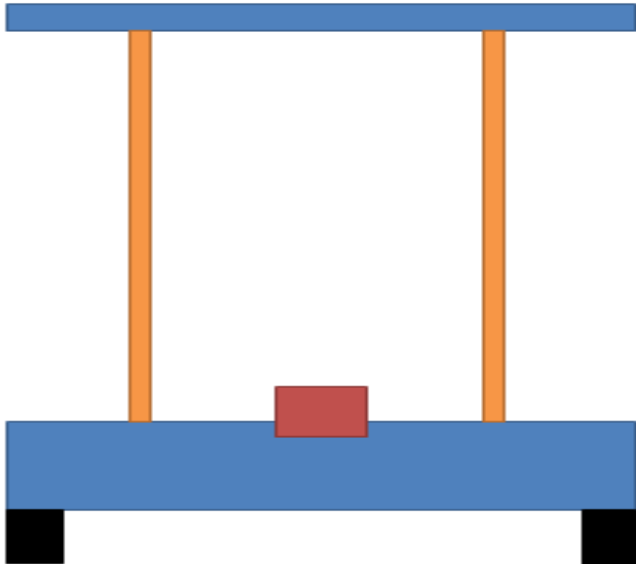


Front View

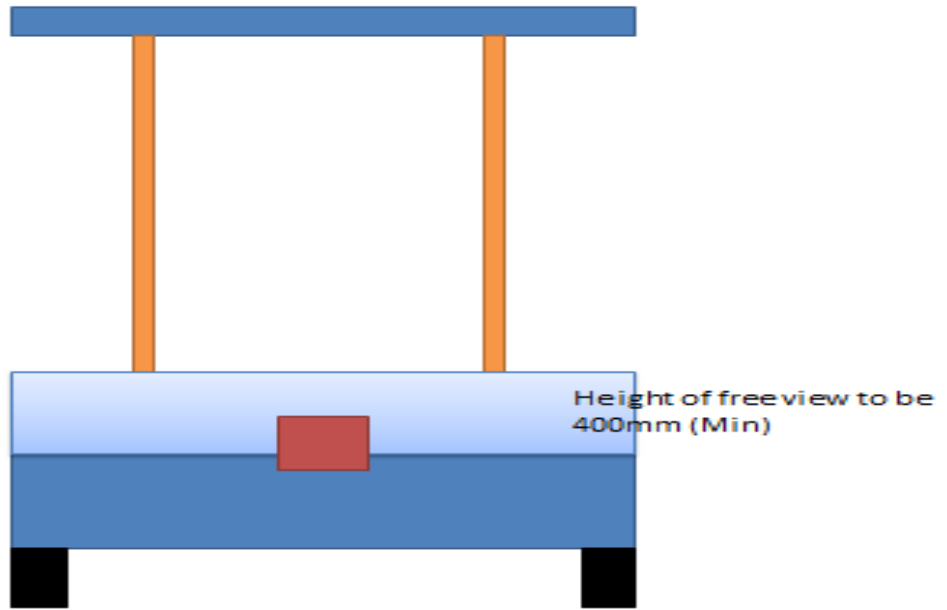


Side View

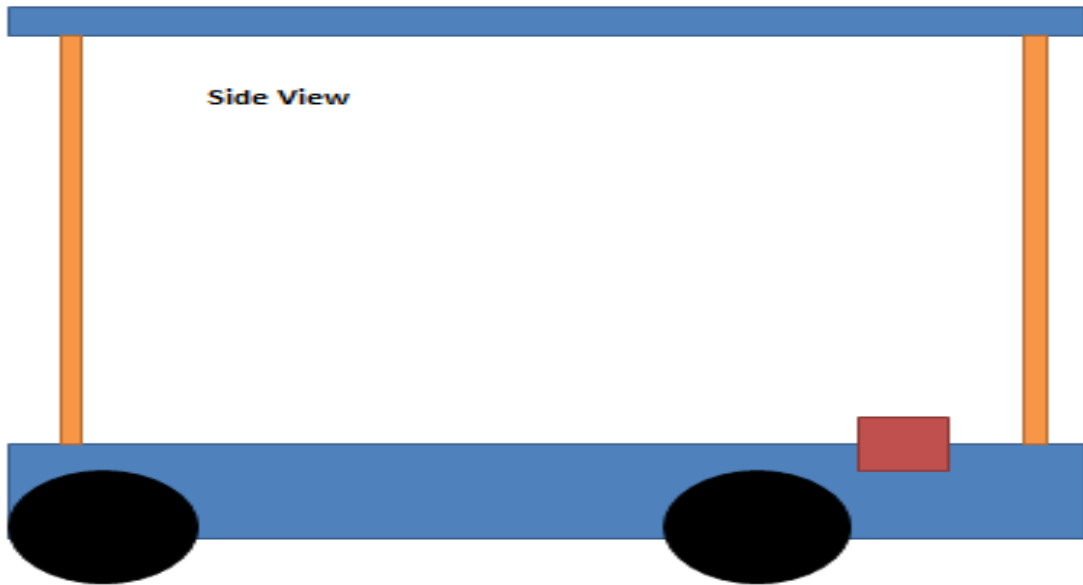


Height of free view to be 400mm (Min)

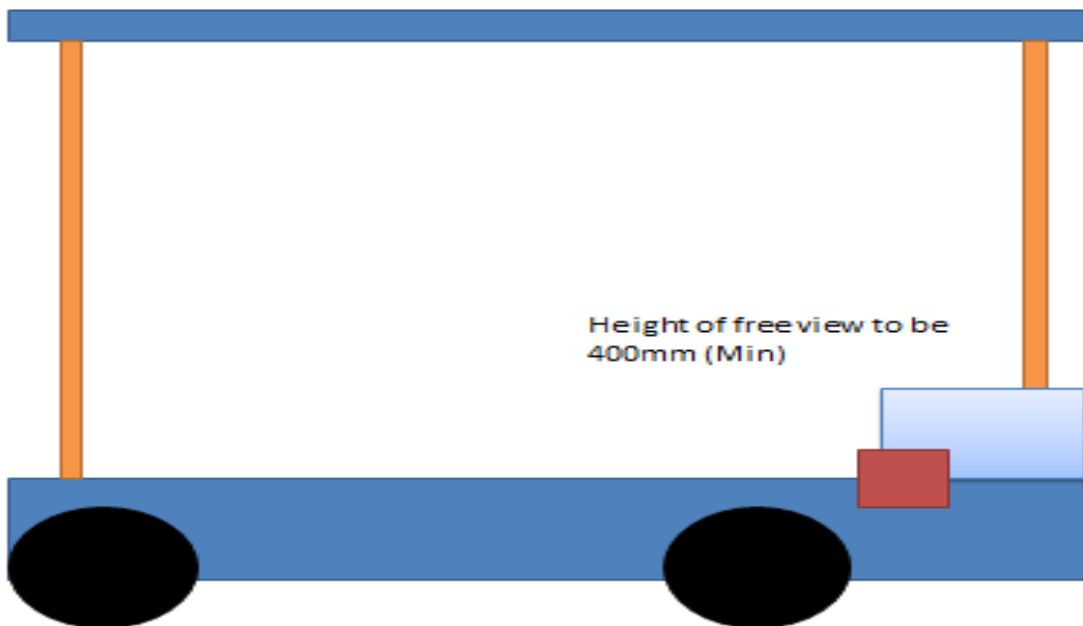

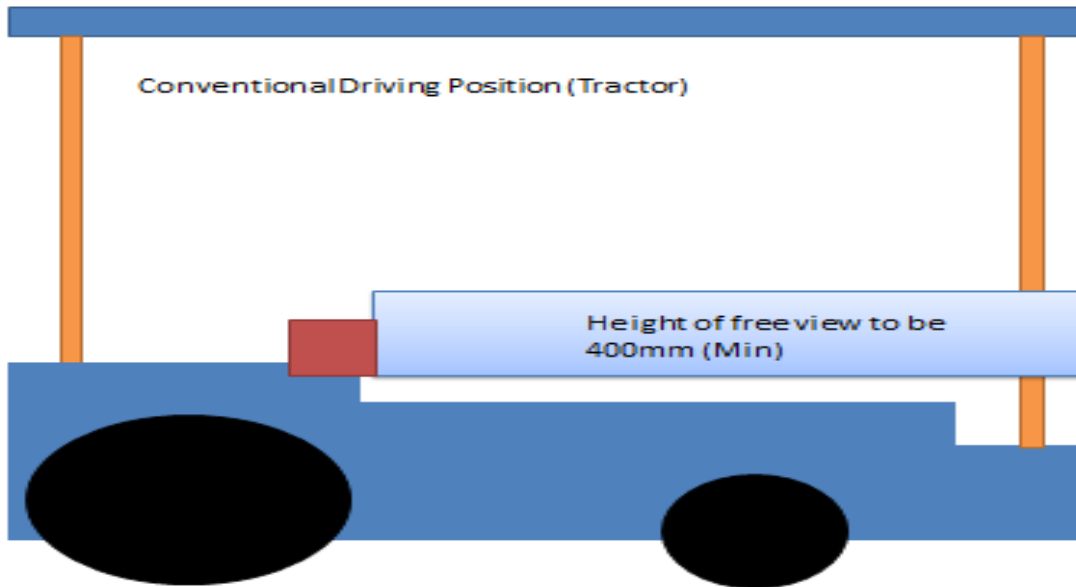

Plan View

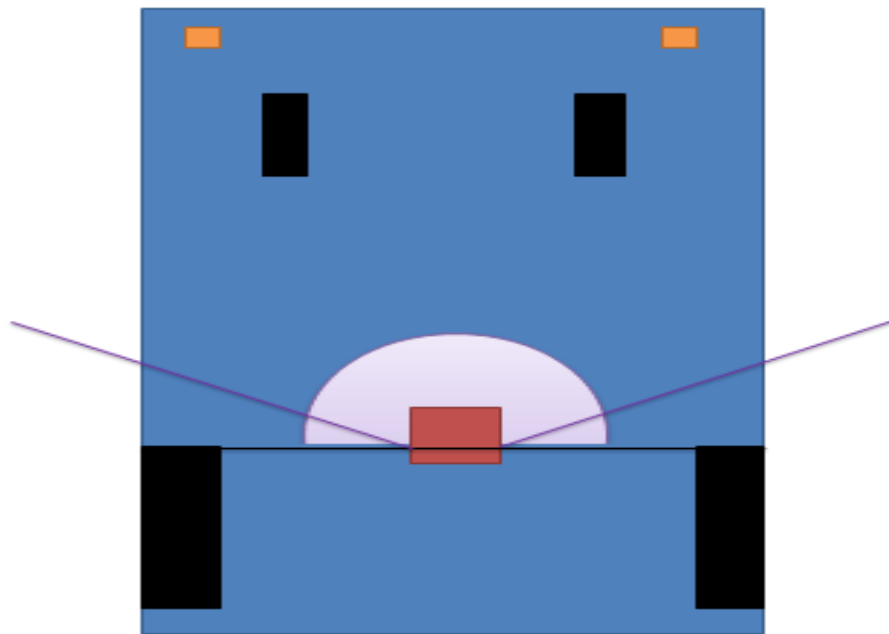

Front View

